

THREE PHASE STRING INVERTER 5-10 KW

CSI-5K-3P | CSI-6K-3P

CSI-8K-3P | CSI-10K-3P



Max. efficiency up to 98.7%, Wide input voltage range



Dual maximum power point tracking



Flexible communication connection: supports RF, WiFi, Ethernet



Transformerless topology




CanadianSolar



Standard warranty, extension up to 20 years

EFFICIENCY CURVE

CSI-10K-T400GL01-AU

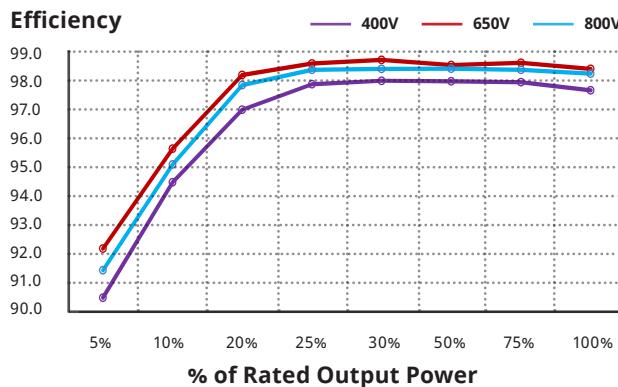

BROAD ADAPTABILITY

- IP65 rated for outdoor application
- Utility interactive controls: Active power derating, reactive power control and over frequency derating
- High switching frequency and ultra fast MPPT for maximum efficiency over a wide load range



CSI Cloud

Log in to the CSI Cloud dashboard anytime from your smart phone or laptop to see:

- Your PV system's performance
- Your solar generation
- Faults and warning diagnostics

CANADIAN SOLAR INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 46 GW deployed around the world since 2001.



Energy Meter

Add the energy meter to your main switchboard to see:

- Your household energy usage
- Net electricity sold or bought from your provider
- Improve your loads usage

For detailed information, please refer to the Installation Manual.

CANADIAN SOLAR INC.

Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
sales.au@canadiansolar.com

SYSTEM/TECHNICAL DATA

MODEL NAME	CSI-5K-T400GL01-AU	CSI-6K-T400GL01-AU	CSI-8K-T400GL01-AU	CSI-10K-T400GL01-AU
DC INPUT				
Max. DC Power	10kW	12kW	12kW	15 kW
Max. DC Input Voltage		1000 V _{DC}		
Start-up DC Input Voltage/Power		180 V _{DC}		
Number of MPP Trackers		2		
MPPT Voltage Range		160 - 850 V _{DC}		
Max. Input Current (Imp)	22A /11A			22A/22A
Max. Short Circuit Current (Isc)	34.3A /17.2A			34.3A/34.3A
Number of DC Inputs	2/3			2/4
DC Disconnection Type		N/A		
AC OUTPUT				
Rated AC Output Power	5 kW	6 kW	8 kW	10 kW
Max. AC Output Power	5.5 kW	6.6 kW	8.8 kW	11 kW
Rated Output Voltage*		230/400 V _{AC}		
Grid Connection Type		3 W / N / PE		
Rated Grid Output Current	7.2 A	8.7 A	11.5 A	14.4 A
Max Output Current	7.9 A	9.5 A	12.7 A	15.9 A
Rated Output Frequency		50 Hz		
Output Frequency Range*		45~55 Hz		
Power Factor		>0.99 (0.8 leading ... 0.8 lagging)		
Current THD		< 1.5 %		
DC Injection Current		< 0.5 % of Rated Grid Output Current		
SYSTEM				
Max. Efficiency	98.3%			98.7%
EU Efficiency	97.8%			98.1%
Night Consumption		< 1 W		
ENVIRONMENT				
Protection Degree		IP65		
Cooling		Forced Ventilation		
Operating Temperature Range		-25 ° C to +60 ° C		
Storage Temperature Range		-40 ° C to +70 ° C		
Operating Humidity		0 - 100 % Condensing		
Operating Altitude		4000 m		
Audible Noise		<60 dBA @ 1 m		
DISPLAY AND COMMUNICATION				
Display		LCD, 2x20 Z		
Communication		WIFI/RS485 Optional		
MECHANICAL DATA				
Dimensions (W / H / D)		563 x 310 x 219 mm		
Weight		18.9kg		
Installation Angle		0~15 Degrees from Vertical		
DC Inputs		MC4		
SAFETY				
Safety and EMC Standard		IEC62109-1/-2, EN61000-6-1/2/3/4		
Grid Standard		AS4777-2:2015, IEC61727, IEC62116		

*The "Rated Output Voltage Range" and "Output Frequency Range" may differ according to specific grid standard.

The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without notice.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.

CANADIAN SOLAR INC.

Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
sales.au@canadiansolar.com