



A Canadian Solar subsidiary

T4 IN-LINE FUSE CONNECTOR

PRODUCT OVERVIEW

T4 in-line fuse connectors use high quality materials that guarantee long-term reliability. Lower contact resistance and higher current transfer capability ensure high product efficiency. T4 in-line fuse connectors have IP68 water-proof rating and can be used in a wide operating temperature range from -40 °C to 90 °C.



T4F15C-PC1 / T4F30C-PC1

ELECTRICAL DATA

Rated Voltage	UL 1500 V _{DC}
Rated Current	15 A / 30 A
Current Withstand Rating	10 KA
Contact Resistance	≤ 0.25 mΩ
Pollution Degree	Class II
Protection Class	Class II
Protection Degree	IP68 (when mated)
Fire Resistance	UL 94-V0
Temperature Range	- 40 °C ~ + 90 °C


MECHANICAL DATA

Conductor Cross Section	IEC: 6mm ² UL: 10 AWG
Connector System	Φ 4.0 mm
Contact Material	Copper, Tin-plated
Type of Termination	Crimping
Locking System (UL)	Locking type


*For detail information, please refer to Installation Manual.

CANADIAN SOLAR (USA), INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 21 GW deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.


ENGINEERING DRAWING (mm)

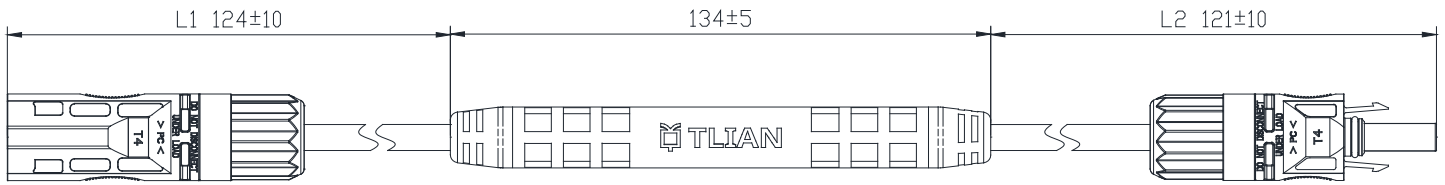

T4F15C-PC1 / T4F30C-PC1

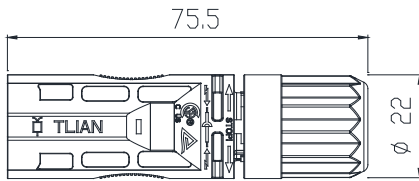

Male connector (-)

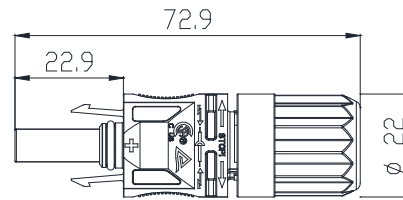

Female connector (+)

T4 IN-LINE FUSE CONNECTOR INFORMATION

Product	Description	Packing Units
T4F15C-PC1	T4-PC-1 Connector 6mm ² / 10AWG UL 1500V / IEC 1000V	10 units or 200 units
T4F30C-PC1	T4-PC-1 Connector 6mm ² / 10AWG UL 1500V / IEC 1000V	10 units or 200 units

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Canadian Solar Inc. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Caution: For professional use only. The installation and handling of connectors requires professional skills and should only be performed by qualified professionals. The connector must be isolated and disconnected from the power supply during the assembly or disassembly process. Do not disconnect under load. The use of a PV cable is recommended. Avoid any grease or oils contacting the body of the T4 PV connector. Please read the safety and installation instructions before using the connector.