

NEW

THREE PHASE STRING INVERTER 50-66 KW

CSI-50KTL-GS-FLB | CSI-50KTL-GS-B
CSI-60KTL-GS-B | CSI-66KTL-GS-B


Canadian Solar's grid-tied, transformer-less string inverters help accelerate the use of three-phase string architecture for commercial rooftop and small ground-mount applications. An NRTL approved, cost-effective alternative to central inverters, these inverters are modular design building blocks that provide high yield and enable significant BoS cost savings. They provide up to 98.8% conversion efficiency, a wide operating range of 200-850 V_{DC}, and four MPPTs for maximum energy harvest.

KEY FEATURES

- Maximum efficiency of 98.8%, CEC efficiency of 98.4%
- 4 MPPTs to achieve higher system efficiency
- Transformerless design
- High switching frequency and ultra fast MPPT (<5 sec.) for maximum efficiency over a wide load range

EFFICIENCY CURVE

CSI-66KTL-GS@480 V

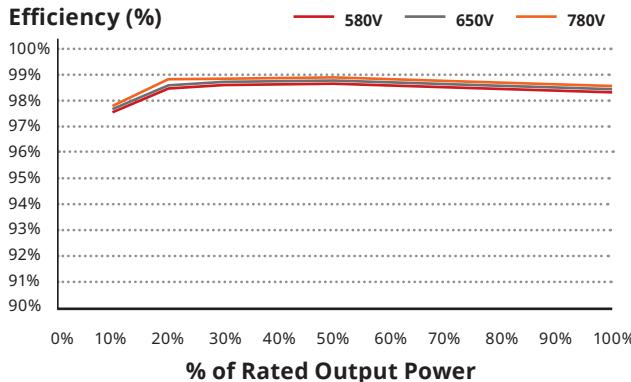

*For detailed information, please refer to the Installation Manual.


Standard warranty, extension up to 20 years

HIGH RELIABILITY

- Advanced thermal design with fan assisted cooling
- Ground-fault detection and interruption circuit
- AFCI Integrated (per UL1699B, factory enabled option)

BROAD ADAPTABILITY

- NEMA 4X (IP65), outdoor application
- Utility interactive controls: active power derating, reactive power control and over frequency derating
- Separable wiring box design
- Integrated DC and AC load rated disconnects
- Wide MPPT range for flexible string sizing
- 0-90 degree installation angle
- AC terminals compatible with copper and aluminum conductors (Al with bimetallic terminal)
- Supports up to 12 or 16 DC string inputs (3 or 4 per MPPT)

CANADIAN SOLAR (USA), INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 38 GW deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.

CANADIAN SOLAR (USA), INC.

 3000 Oak Road, Suite 400, Walnut Creek, CA 94597, USA | www.canadiansolar.com/na | sales.us@canadiansolar.com

SYSTEM/TECHNICAL DATA

MODEL NAME	CSI-50KTL-GS-FLB	CSI-50KTL-GS-B	CSI-60KTL-GS-B	CSI-66KTL-GS-B
DC INPUT				
Max. PV Power	64 kW (16 kW/MPPT)	75 kW (22.5 kW/MPPT)	90 kW (22.5 kW/MPPT)	90 kW (22.5 kW/MPPT)
Max. DC Input Voltage		1000 V _{DC}		
Operating DC Input Voltage Range		200-850 V _{DC}		
Start-up DC Input Voltage/Power		200 V		
Number of MPP Trackers		4		
MPPT Voltage Range	568-850 V _{DC}		526-850 V _{DC}	579-850 V _{DC}
Operating Current (Imp)	88 A (22 A per MPPT)		114 A (28.5 A per MPPT)	
Max. Input Current (Isc)		220A (55 A per MPPT)		
Number of DC Inputs	12 (3 per MPPT)		16 (4 per MPPT)	
DC Disconnection Type		Load rated DC switch		
AC OUTPUT				
Rated AC Output Power	50 kW	50 kW	60 kW	66 kW
Max. AC Output Power	50 kW	50 kW	60 kW	66 kW
Rated Output Voltage		480 V _{AC}		
Output Voltage Range*		422.4 - 528 V _{AC}		
Grid Connection Type		3 Φ/PE		
Nominal AC Output Current @480 Vac	60.2 A		72.2 A	79.4 A
Rated Output Frequency		60 Hz		
Output Frequency Range*		59.5 - 60.5 Hz		
Power Factor		1 default (±0.8 adjustable)		
Current THD		< 3 %		
AC Disconnection Type		Load rated AC switch		
SYSTEM				
Topology		Transformerless		
Max. Efficiency	98.8 %	98.8 %	98.7 %	98.8 %
CEC Efficiency		98.4 %		
Night Consumption		< 1 W		
ENVIRONMENT				
Protection Degree		NEMA 4X		
Cooling	Natural Convection Cooling		Intelligent Redundant Cooling	
Operating Temperature Range		-13 ° F to + 140 ° F / -25 ° C to +60 ° C		
Storage Temperature Range		-40 ° F to + 158 ° F / -40 ° C to +70 ° C		
Operating Humidity		0 - 100 %		
Operating Altitude		13,123.4 ft / 4000 m		
Audible Noise		<60 dBA @ 1 m		
DISPLAY AND COMMUNICATION				
Display		LCD + LED		
Communication		Standard: RS485 (Modbus)		
MECHANICAL DATA				
Dimensions (W / H / D)		24.8 x 40.7 x 13.9 in / 630 x 1034 x 354 mm		
Weight	165 lb / 74.8 kg		172 lb / 78 kg	
Installation Angle	90 degrees from horizontal		0-90 degrees from horizontal	
DC Inputs		15 A standard		
SAFETY				
Safety and EMC Standard		UL1741-SA, UL1699B, CSA-C22.2 No. 107.1-01, IEEE1547; FCC PART 15		
Grid Standard		IEEE1547, Rule 21		
Smart-Grid Features		Voltage-Ride Thru, Frequency-Ride Thru, Soft-Start, Volt-Var, Frequency-Watt, Volt-Watt		

*The "Output Voltage Range" and "Output Frequency Range" may differ according to specific grid standard.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Canadian Solar Inc. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.