

# MAXPOWER

## CS6U-340|345|350P

### HIGH EFFICIENCY POLY MODULE

Canadian Solar's high efficiency poly modules use the latest innovative cell technology, increasing module power output and system reliability, ensured by 16 years of experience in module manufacturing, well-engineered module design, stringent BOM quality testing, an automated manufacturing process and 100% EL testing.

#### KEY FEATURES



Excellent module efficiency  
of up to 18.00%




High PTC rating of up to 92.21 %



IP68 junction box for long-term  
weather endurance



Heavy snow load up to 5400 Pa,  
wind load up to 3600 Pa

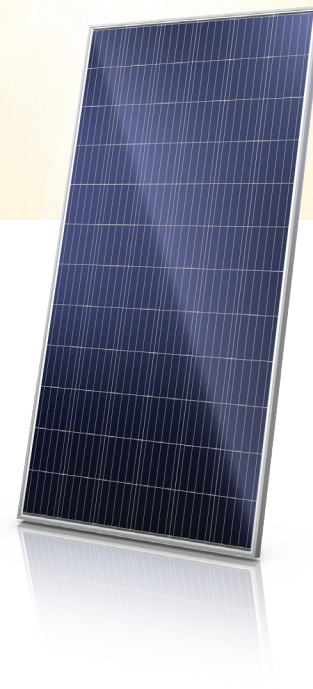

**linear power output warranty**



**product warranty on materials  
and workmanship**

#### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2008 / Quality management system

ISO 14001:2004 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

#### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: VDE / CE

UL 1703 / CEC & FSEC listed (US)



\* As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

**CANADIAN SOLAR (USA), INC.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 26 GW deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.


\*For detail information, please refer to Installation Manual.

**CANADIAN SOLAR (USA), INC.**


3000 Oak Road, Suite 400, Walnut Creek, CA 94597, USA | [www.canadiansolar.com/na](http://www.canadiansolar.com/na) | [sales.us@canadiansolar.com](mailto:sales.us@canadiansolar.com)

## ENGINEERING DRAWING (mm)


### Rear View

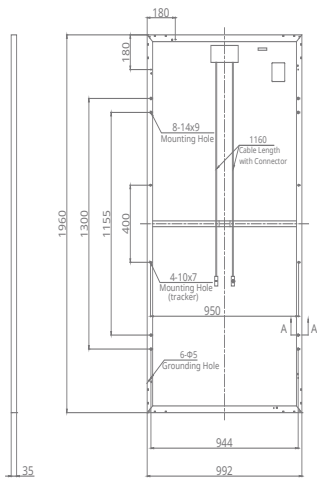


### Frame Cross Section A-A



### Mounting Hole

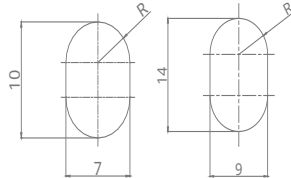

## CS6U-345P / I-V CURVES

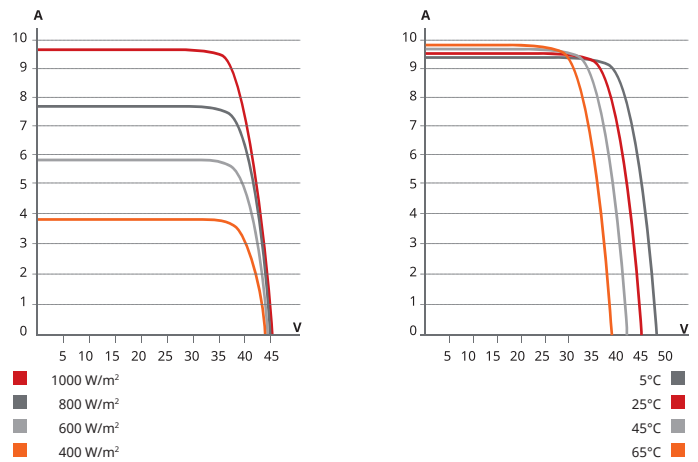

## ELECTRICAL DATA | STC\*

CS6U	340P	345P	350P
Nominal Max. Power (Pmax)	340 W	345 W	350 W
Opt. Operating Voltage (Vmp)	37.6 V	37.8 V	38.1 V
Opt. Operating Current (Imp)	9.05 A	9.13 A	9.21 A
Open Circuit Voltage (Voc)	45.9 V	46.0 V	46.2 V
Short Circuit Current (Isc)	9.62 A	9.69 A	9.79 V
Module Efficiency	17.49%	17.74%	18.00%
Operating Temperature	-40°C ~ +85°C		
Max. System Voltage	1000 V (IEC/UL) or 1500 V (IEC/UL)		
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)		
Max. Series Fuse Rating	20 A		
Application Classification	Class A		
Power Tolerance	0 ~ + 5 W		

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

## MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 6 inch
Cell Arrangement	72 (6 × 12)
Dimensions	1960 × 992 × 35 mm (77.2 × 39.1 × 1.38 in)
Weight	22.4 kg (49.4 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm² (IEC), 12 AWG (UL), 1160 mm (45.7 in)
Connector	T4 series
Per Pallet	30 pieces
Per Container (40' HQ)	720 pieces

## ELECTRICAL DATA | NMOT\*

CS6U	340P	345P	350P
Nominal Max. Power (Pmax)	251 W	254 W	258 W
Opt. Operating Voltage (Vmp)	34.6 V	34.8 V	35.1 V
Opt. Operating Current (Imp)	7.25 A	7.32 A	7.36 A
Open Circuit Voltage (Voc)	42.9 V	43.0 V	43.2 V
Short Circuit Current (Isc)	7.76 A	7.82 A	7.90 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.39 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	43±3 °C

## PERFORMANCE AT LOW IRRADIANCE

Outstanding performance at low irradiance, with an average relative efficiency of 96.0 % from irradiances, between 200 W/m² and 1000 W/m² (AM 1.5, 25°C).

## PARTNER SECTION



\*The specification and key features contained in this datasheet may deviate slightly from our actual products due to on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustments to the information described herein at any time without further notice.